

# XRAY

## XB8 · GTX8 · XT8

### #358709 ALU MONOBLOCK ENGINE MOUNT - SWISS 7075 T6

#358718 ALU STAND FOR ENGINE MOUNT - FX, NOVAROSSİ, MAX, SIRIO

#358719 ALU STAND FOR ENGINE MOUNT - PICCO, REDS, ORION, LRP, OS, ULTIMATE RACING

The XRAY Alu Adjustable Engine Mount provides not only solid engine mounting and easy adjustment, but its unique keyed-mount design allows you to remove and replace the engine without having to re-adjust gear mesh. Adjust the mesh once only!

The engine mount assembly consists of two pieces: the adjustable base which is affixed to the chassis, and the upper mounts which are attached to the engine. The single-piece engine mounts allow easy access to the rear cover of the engine so you do not have to disassemble the mounts at any time.

The 1-pc lower base is universal, with a pair of engine mounts available separately to fit various engines:

#358718 - for FX/Novarossi/Max/Sirio engines


#358719 - for Picco/Reds/Orion/LRP/OS, Ultimate Racing engines

### INSTALLING THE ENGINE:


- ❶ Attach the engine to the upper mounts.
- ❷ Attach the upper mounts (with the engine) to the lower base.
- ❸ Attach the lower base to the chassis, adjust the gear mesh, then tighten the base to the chassis.

#### ADJUST THE GEAR MESH

Only for the first time.



Before tightening, make sure that the gear mesh is set properly. For more information about engine adjustment, see the XRAY XB8 Instruction Manual.

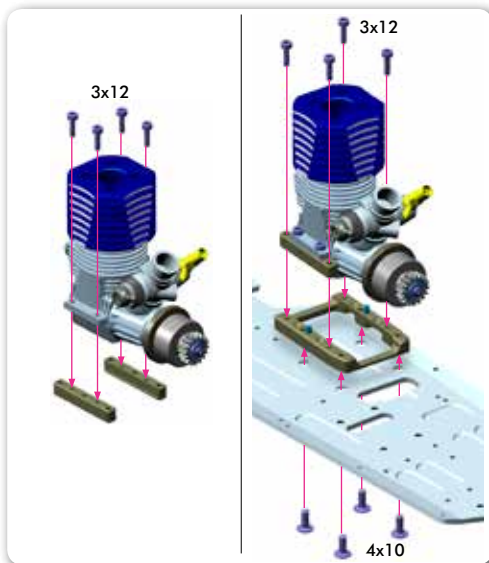

### REMOVING & REINSTALLING THE ENGINE:

- ❶ Remove the screws attaching the upper mounts to the base.
- ❷ Remove the engine (with the attached upper mounts); the base remains attached to the chassis.
- ❸ Perform maintenance on the engine; keep the upper mounts attached to the engine.
- ❹ Reinstall the engine. Key the upper mounts to the lower base, install the screws, and then tighten the screws securely.

