

XRAY T2

#302661 CLOSED BALL JOINT 5MM


#302653 BALL END 4.9MM WITH THREAD 6MM (2)

#302654 BALL END 4.9MM WITH THREAD 8MM (2)



The closed ball joint prevents dust from getting onto the ball end, allowing the upper camber links to move more freely.

The new closed ball joints must be used with the new ball ends. However, the new ball ends are designed to be used with standard open ball joints as well.

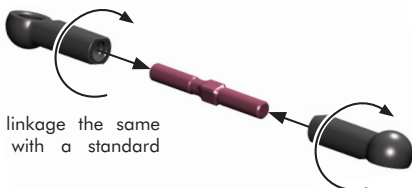



Make the linkage the same length as with a standard linkage.

The ball ends are available in two lengths for front and rear suspension, respectively.

REAR
#302653



FRONT
#302654

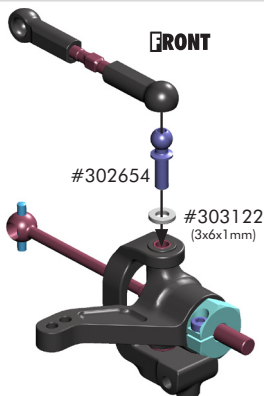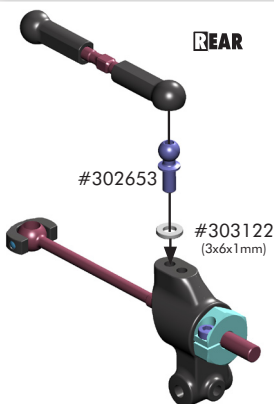

The new ball ends are a direct replacement for the standard balls and were designed to keep the same geometry; no re-adjustments are necessary.

The number of shims should be the same as are used with standard ball joints.